


# Depac komponent-tætninger TYPE 170/170A



## DEPAC ADVANTAGES

- Premounted rotating unit
- Direction of rotation independent
- Wide range of applications
- Low cost
- For short and DIN installation length
- No shaft or sleeve wear

## TECHNICAL DATA

### Range of Application

Pressure - 10Bar (150 PSI)  
 Temp. - Elastomer dependent  
 Speed - 15m/sec. (3000 FPM)


### Sizes

Dshaft - 10.....75 mm, 3/8".....3"


### Materials

Metals - DIN 1.4301, 1.4571  
 - 304 SS, 316 SS  
 Springs - DIN 1.4310, 301 SS  
 Faces - -CA, CE, SC, SSIC  
 Rubber bellows -NBR, EPDM, Viton  
 - stationary cup PTFE



Other sizes, materials or design variations upon request



- Short Length
- Available in mm and inch measurements



- L<sub>1</sub>K<sub>u</sub> installation is in connection with stationary DS 4

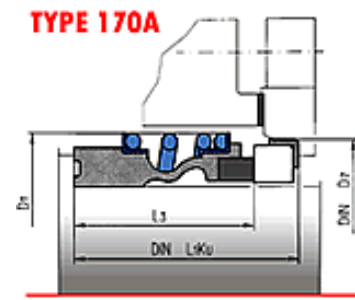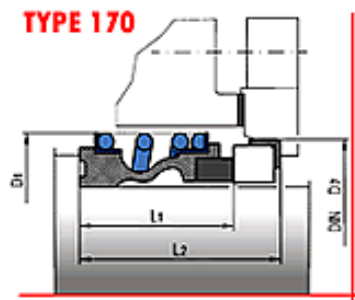

MM

Ds	D1	D2	DIN D7	L1	L2	L3	DIN L1Ku
10	22,5	20,0	21,0	14,5	21,0	25,9	32,5
12	25,0	22,0	23,0	15,0	21,6	25,9	32,5
14	28,5	24,0	25,0	17,0	23,6	28,4	35,0
16	28,5	26,0	27,0	17,0	23,6	28,4	35,0
18	32,0	32,0	33,0	19,5	27,0	30,0	37,5
20	37,0	34,0	35,0	21,5	29,0	30,0	37,5
22	37,0	36,0	37,0	21,5	29,0	30,0	37,5
24	42,5	38,0	39,0	22,5	30,0	32,5	40,0
25	42,5	39,0	40,0	23,0	30,5	32,5	40,0
28	49,0	42,0	43,0	26,5	34,0	35,0	42,5
30	49,0	44,0	45,0	26,5	34,0	35,0	42,5
32	53,5	46,0	48,0	27,5	35,0	35,0	42,5
33	53,5	47,0	48,0	27,5	35,0	35,0	42,5
35	57,0	49,5	50,0	28,5	36,0	35,0	42,5
38	59,0	54,0	56,0	30,0	39,0	36,0	45,0
40	62,0	56,0	58,0	30,0	39,0	36,0	45,0
43	65,5	59,0	61,0	30,0	39,0	36,0	45,0
45	68,0	61,0	63,0	30,0	39,0	36,0	45,0
48	70,5	64,0	66,0	30,5	39,5	36,0	45,0
50	74,0	66,0	70,0	30,5	40,0	38,0	47,5
53	78,5	69,0	73,0	33,0	44,0	36,5	47,5
55	81,0	71,0	75,0	35,0	46,0	36,5	47,5
60	88,5	80,0	80,0	38,0	49,0	41,5	52,5
65	93,5	85,0	85,0	40,0	51,0	41,5	52,5
70	99,5	90,0	92,0	40,0	51,3	48,7	60,0
75	107,0	99,0	97,0	40,0	51,3	48,7	60,0
80	112,0	104,0	105,0	40,0	52,0	48,0	60,0