


Depac komponent-tætninger TYPE 186K

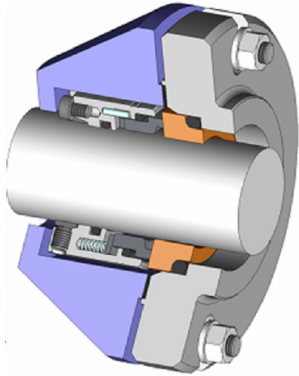

DEPAK ADVANTAGES

- Pressure balanced for longer service life
- Wide range of applications
- Direction of rotation independent
- Type 186K also for slurry applications
- Springs outside the media
- Direction of rotation independent
- Extremely short installation length
- Replaces all rubber bellow seals
- Seal is clamped to shaft, no shaft damage

TECHNICAL DATA


Range of Application

Pressure -700mm Hg (28"HG)
 -28bar (420 PSI)
 Temp. -Elastomer dependent
 Speed -25m/sec. (5000 FPM)
Sizes
 Dshaft -25.....100mm, 1.....4"

Materials

Metals -DIN 1.4571, 316 SS,
 -Hastelloy C
 Springs -Hastelloy C
 Faces -CA, SC, SSIC, TC
 O-rings -Viton, EPDM, PTFE, FEP encaps,
 -Chemraz, Kalrez, Aflas, etc.

Other sizes, materials or design variations upon request

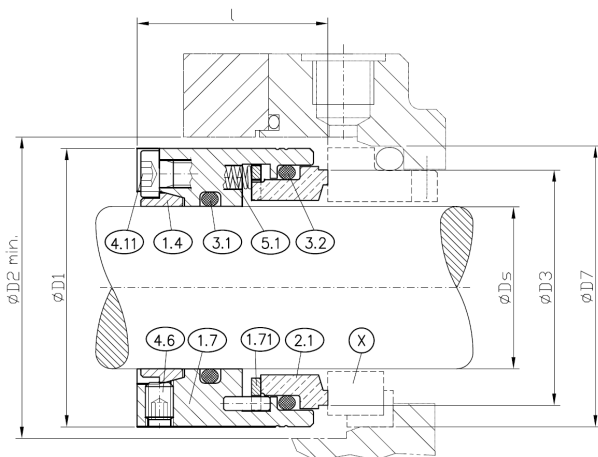

MM

Ds	D ₁	D ₂ min.	D ₃	D ₇	L
25	42,5	44,5	36,1	40,0	23,0
28	45,5	47,5	39,1	43,0	26,5
30	47,5	49,5	41,1	45,0	26,5
32	50,0	52,0	42,6	48,0	27,5
33	50,0	52,0	42,6	48,0	27,5
35	53,0	55,0	45,9	50,0	28,5
38	56,0	58,0	49,9	56,0	30,0
40	58,0	60,0	51,9	58,0	30,0
43	61,0	63,0	54,9	61,0	30,0
45	63,0	65,0	56,9	63,0	30,0
48	66,0	67,0	60,9	66,0	30,5
50	68,0	70,0	62,9	70,0	30,5
53	74,0	76,0	65,9	73,0	33,0
55	76,0	78,0	67,9	75,0	35,0
58	79,0	81,0	70,9	78,0	37,0
60	81,0	83,0	72,9	80,0	38,0
65	90,0	93,0	77,2	85,0	40,0
68	93,0	96,0	82,2	90,0	40,0
70	95,0	98,0	85,7	92,0	40,0
75	100,0	103,0	90,7	97,0	40,0
80	105,0	108,0	95,7	105,0	40,0
85	110,0	113,0	100,7	110,0	41,0
90	117,0	120,0	105,7	115,0	45,0
95	122,0	125,0	110,7	120,0	46,0
100	127,0	130,0	115,7	125,0	47,0