


Depac komponent-tætninger TYPE 196



DEPAC ADVANTAGES

- Stationary mechanical seal design
- No fretting of shafts / sleeves
- Pressure balanced
- No stepped sleeve for pressure balancing necessary
- Shock and vibration dampened secondary faces
- Springs outside the media
- Direction of rotation independent

TECHNICAL DATA


Range of Application

Pressure -700mm Hg (28"HG)
 -30bar (450 PSI)
 Temp. -Elastomer dependent
 Speed -30m/sec. (6000 FPM)
Sizes
 Dshaft -18.....100mm, 1.....4"

Materials

Metals -DIN 1.4571, 316 SS,
 -Hastelloy C
 Springs -Hastelloy C
 Faces -CA, CE, SC, SSIC, TC
 O-rings -Viton, EPDM, PTFE, FEP encaps,
 -Chemraz, Kalrez, Aflas, etc.

Other sizes, materials or design variations upon request

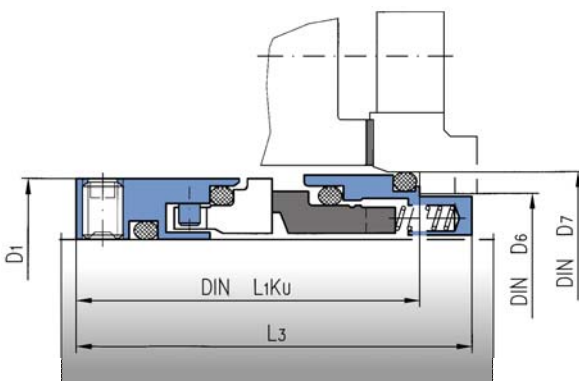

MM

Ds	D1	D6	DIN D7	DIN L1	L3	L1Ku
18	31,5	27,0	33,0	27,0	45,0	37,5
20	33,5	29,0	35,0	27,0	45,0	37,5
22	35,5	31,0	37,0	27,0	45,0	37,5
24	37,5	33,0	39,0	30,0	48,0	40,0
25	38,5	34,0	40,0	30,0	48,0	40,0
28	42,0	37,0	43,0	31,0	51,0	42,5
30	44,0	39,0	45,0	31,0	51,0	42,5
32	46,0	42,0	48,0	31,0	51,0	42,5
33	47,0	42,0	48,0	31,0	51,0	42,5
35	49,0	44,0	50,0	31,0	51,0	42,5
38	54,0	49,0	56,0	33,5	53,5	45,0
40	56,0	51,0	58,0	33,5	53,5	45,0
43	59,0	54,0	61,0	33,5	53,5	45,0
45	61,0	56,0	63,0	33,5	53,5	45,0
48	64,0	59,0	66,0	33,5	53,5	45,0
50	66,0	62,0	70,0	31,0	56,0	47,5
53	69,0	65,0	73,0	31,0	56,0	47,5
55	71,0	67,0	75,0	31,0	56,0	47,5
60	76,0	72,0	80,0	36,0	61,0	52,5
65	81,0	77,0	85,0	36,0	61,0	52,5
70	86,0	83,0	92,0	43,5	68,5	60,0
75	91,0	88,0	97,0	43,5	68,5	60,0
80	101,0	95,0	105,0	43,5	68,5	60,0
85	106,0	100,0	110,0	43,5	68,5	60,0
90	111,0	105,0	115,0	48,5	73,5	65,0
95	116,0	110,0	120,0	48,5	73,5	65,0
100	121,0	115,0	125,0	48,5	73,5	65,0